




**Developmental
Industries, Inc.**
- CORINTH, MS -

SGT-PPA-150 Pressure Applicator



PROUDLY MADE IN THE USA

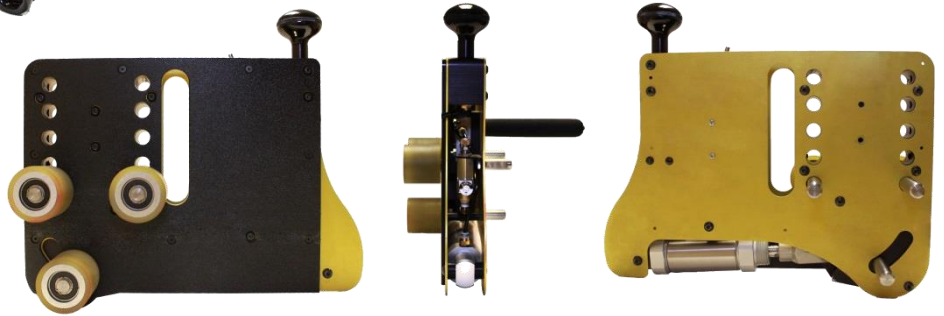

TOOL FEATURES

- **WEIGHT:** 11.7 lbs (5.3 kg)
- **DIMENSIONS:** 14-1/2" x 13" x 10-1/2"
(36.8 cm x 33 cm x 26.7 cm)
- **CLAMPING RANGE:** 0" to 5-7/8"
(0 mm to 150 mm)
- **CLAMPING FORCE:** Varies depending on tool air pressure setting and supply air pressure (e.g., 75 psi tool setting and input air pressure yield 100-125 lbs. clamping force)
- **ROLLERS:** Precision ball-bearing wheels with a durable urethane surface (70-75 Shore A)
- **ROLLER ADJUSTMENT:** 0" to 2-1/4"
(0 mm to 57.2 mm) from tool body
- **ALUMINUM BODY:** T6 Aircraft Aluminum Type II Anodized

SGT-PPA-150 PRESSURE APPLICATOR for 3M™ VHB™ STRUCTURAL GLAZING TAPE APPLICATIONS

Developmental Industries Inc. has created a pressure applicator for use with 3M™ VHB™ Structural Glazing Tape based glazing systems. This tool is lightweight and easily portable with an improved ergonomic design. The manually operated SGT-PPA-150 tool delivers consistent and even pressure utilizing pneumatic power.

The tool is constructed from solid T6 aircraft aluminum for superior strength with a Type II anodized coating to military specifications for exceptional corrosion and wear resistance. The SGT-PPA-150 is a 3M-approved pressure application tool for some 3M™ VHB™ Structural Glazing Tape systems.

PRICING

SGT-PPA-150 Tool	\$2,399 + shipping
Storage Case	\$199 + shipping
Delivery – Stock Tool:	2 Days Subject to Prior Sales
Custom Tool Series:	Call for Quote

All 3M™ VHB™ Structural Glazing Tape projects must be reviewed on a project-specific basis by a 3M representative to begin the structural glazing process. 3M™ VHB™ Structural Glazing Tape Sales and Technical Service Representatives are available to assist the customer to determine the suitability of 3M™ VHB™ Structural Glazing Tape for glazing applications.